


## POPS-10 POWERED ORDER PICKER STACKER (1000 KGS, 2200 LB)




- THE ORDER PICKER CAN STAND IN-SIDE OF THE LIFT TABLE AND CONTROL UP/DOWN.
- ADJUSTABLE FORGED FORKS, SUITABLE FOR ANY KINDS OF PALLETS.
- RAISE THE FORKS A FURTHER 800MM FOR PICKER USE. THE MAX. FORK LIFTING HEIGHT IS THE MAX. LIFT TABLE HEIGHT PLUS 800MM.
- RIDE-ON PLATFORM AT BACK-SIDE FOR DRIVING USE.
- DOUBLE HYDRAULIC CONTROL SYSTEMS IN THE LIFT TABLE AND RIDE-ON PLATFORM.



Description		POPS-10			
Rated Lifting capacity		1000 kg			
Load center		500 mm			
Max. Lifting speed	Empty	210 mm/s			
	Loaded	130 mm/s			
Max. Lowering speed	Empty	290 mm/s			
	Loaded	500 mm/s			
Travel speed	Empty	4 km/h			
	Loaded	3 km/h			
Gradeability	Empty	8%			
	Loaded	5%			
Battery capacity at 5 hours discharge rate (Traction Battery)		240A/24V			
Charger:(220Vx1ø)(With microprocessor) (Optional:110Vx1ø)		40A/24V			
Drive Wheel		Ø212X70 mm			
Drive motor power		1.5 KW/24V			
Main lift motor power		3.0 KW/24V			
Small lift motor power		2.0 KW/24V			
Speed control principle number of steps		Resistance 3 speed is optional, Electronic motor stepless standard.			
Body Length		A	1600 mm		
Body Width		B	850 mm		
Front wheel width		C	850 mm		
Wheel base		D	1250 mm		
Fork length		F	1070 mm		
Turning radius		H1	1460 mm		
Turning radius		H2	1900 mm		
Service Weight	With battery	1715 kg			
	Without battery	1500 kg			
Picker fork lift Height		800mm			
Front wheel	Dimension	ø150x50 mm			
	Quantity(R/L)	1/1			
	Material	Vulcollan			
Main mast type		Max. main lift table height (M)mm			
Duplex mast telescopic	2000	2500	3000	3500	4000
Min. mast height(N)	1600	1850	2100	2350	2600
Max. mast height(P)	3300	3800	4300	4800	5300
Picker working height	4000	4500	5000	5500	6000
Max. Fork lifting height	2800	3300	3800	4300	4800

## SPOP-02 SEMI-POWERED ORDER PICKER STACKER (200KG, 440LB)

- QUIET, CLEAN, HIGH QUALITY.
- THE PICKER CAN PICK THE GOODS AT 4.5 METER HIGH.
- PICKING HEIGHT 5.0 AND 5.5 METER ARE OPTIONAL.
- CHARGER OF 110V/12V-12A (BUILD-IN) IS OPTIONAL.
- MANUALLY PROPELLED, POWERED LIFTING ORDER PICKER STACKER.
- THE UP/DOWN SWITCH IS BUILT IN THE SIDE RAIL. IT IS VERY EASY TO HANDLE.
- LIGHT WEIGHT STACKER. IT IS VERY EASY OPERATED AND VERY DURABLE QUALITY.
- 2 PIECES OF FOOT PARKING BRAKES.

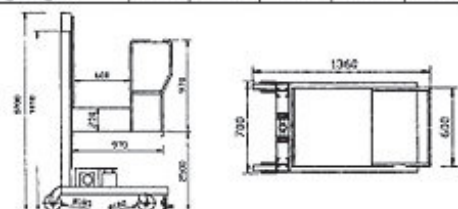

Model:		SPOP-02	
Load capacity	200 kg		
Service weight	308 kg		
Overall length	1360 mm		
Overall width	700 mm		
Min. mast height	1810 mm		
Max. mast height	3700 mm		
Max. lifting height	2500 mm		
Min. stand height	460 mm		
Loading stand height	250 mm		
Platform overall length	970 mm		
Loading stand length	600 mm		
Loading stand width	600 mm		
Rear wheel	ø180x50 mm		
Front wheel	ø180x50 mm		
Hand rail height	970 mm		
Lifting speed	10-14 M/MIN		
Lowering speed	6-9M/MIN		
Lifting motor	1.5 KW/12V		
Battery	135AH/12V		
Charger(220v/110v)(1Phase)	12V-12A		